

# Refilling Instructions

for Epson Stylus S020118, S020122, S020126 and S020130  
Single Color Cartridges  
(used in Epson Color 3000 & 5000 printers)

for Epson Stylus S020143 and S020147 Two Color Cartridges  
(used in Epson Stylus Color 5000 printers)


**CAUTION** Before starting, cover work area with several layers of newspaper or paper towels, (spills are unlikely, but you should be prepared). Have facial tissues handy—if a spill occurs, it should be blotted up with tissues. The syringe needle has a sharp point — replace the protective scabbard before storing.

1. Remove empty ink cartridge from printer according to Epson's instructions.

## For Single Color Cartridges:

2. Locate rubber fill septum on cartridge (see Illustration 1). Slowly draw 50cc of ink into syringe. Hold cartridge with fill septum facing up and push needle of syringe into septum as far as it will go.

3. Slowly dispense ink into cartridge.

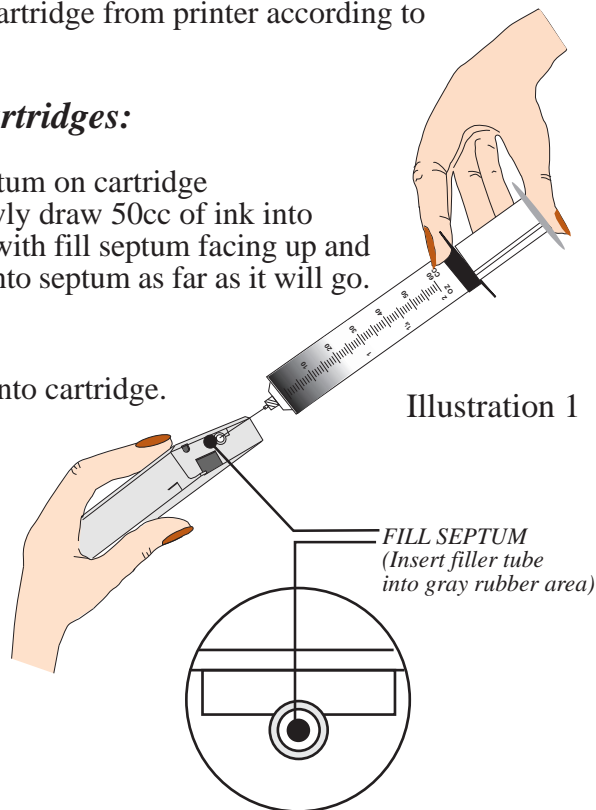

4. Withdraw syringe from cartridge.

5. Repeat steps 2 and 3.


6. Draw syringe plunger back slowly to remove air from cartridge bladder until ink just starts to be drawn back. Remove needle from cartridge. Dispense the ink in syringe back into ink bottle.

7. Insert refilled cartridge in printer according to Epson's instructions.

## For Two Color Cartridges:

Determine if the light or dark shade is depleted and inject only one 50cc shot of ink into the empty chamber (See Illustration 2). Then continue with steps 6 & 7 above.

Illustration 2

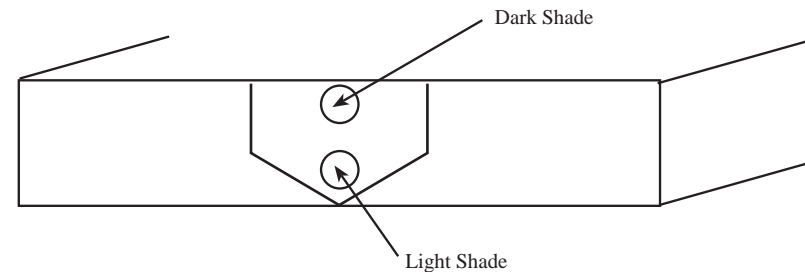

**REPEAT-O-TYPE**  
MANUFACTURING CORPORATION  
ESTABLISHED 1931

665 State Highway 23 • Wayne, NJ 07470-6892, USA • (973) 696-3330 • (800) 288-3330  
Fax (973) 694-7287 • Email [help@repeatotype.com](mailto:help@repeatotype.com)

Epson is a trademark of Seiko Epson Corp. ©1999 Repeat-O-Type Manufacturing Corporation.