



# Refilling Instructions

For Canon Bubble Jet BJC-7000/8000 Series • BC-60 Black Cartridge Contents:

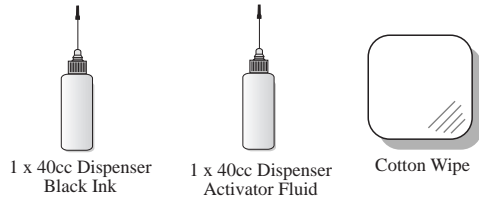


Your BC-60 Black Cartridge



Refilling your cartridge is a clean and simple job, but it is advisable to cover your work area with scrap paper to protect from accidental spills.

Note: Empty cartridges should be refilled as soon as they run out of ink to prevent the small amount of ink remaining in the cartridge from drying in the nozzles and creating a stubborn clog.

1. Remove BC-60 cartridge from printer.
2. Carefully peel back the label starting at the top and working down until four holes are exposed. See Figure A.

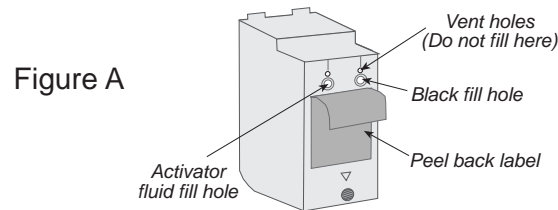

3. Remove the scabbard from the black ink dispenser bottle. Lift the cartridge off the table; hold it so that you can insert the dispenser needle into the ink fill hole without spilling. Push needle in as far as it will go. Place cartridge back on table so that dispenser is fully inverted. See Figure B. Pull dispenser out about 1/4" (6mm) to create a void in the sponge so that ink will flow easily. Squeeze dispenser bottle slowly and dispense ink. If necessary, withdraw needle to allow air back into dispenser bottle, then reinsert and continue filling. Continue dispensing until ink dispenser bottle is empty or you start to see ink in the fill hole. Remove the dispenser and recap to save any remaining ink.

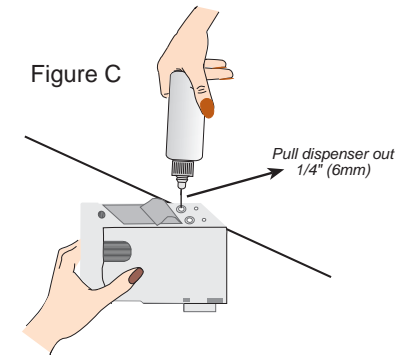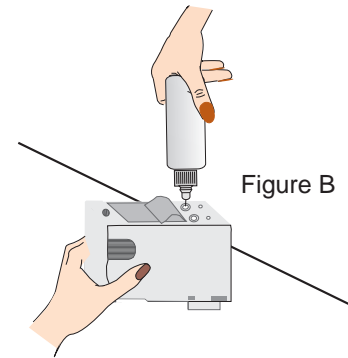

4. Repeat the same procedure to fill the activator fluid compartment of the cartridge.
5. Wipe the cartridge surface around the fill holes using the cotton wipe provided. Reseal the label.
6. Put cartridge back in printer and run a cleaning cycle or two.

IF YOU HAVE ANY QUESTIONS OR ENCOUNTER ANY DIFFICULTY IN USING THIS PRODUCT, PLEASE CONTACT:

**REPEAT-O-TYPE**  
MANUFACTURING CORPORATION  
ESTABLISHED 1931

665 State Highway 23 • Wayne, NJ 07470-6892 U.S.A. • (973) 696-3330 • (800) 288-3330  
Fax: (973) 694-7287 • Email: help@repeatotype.com