


Refill Instructions

Fill N Print™ 26/29A

Supplies you should have before you begin: Paper towel, latex gloves.

Because ink can make a mess plan for this before you begin filling cartridges.

You may want to fill them initially in a sink as you gain experience using the **Fill N Print™**

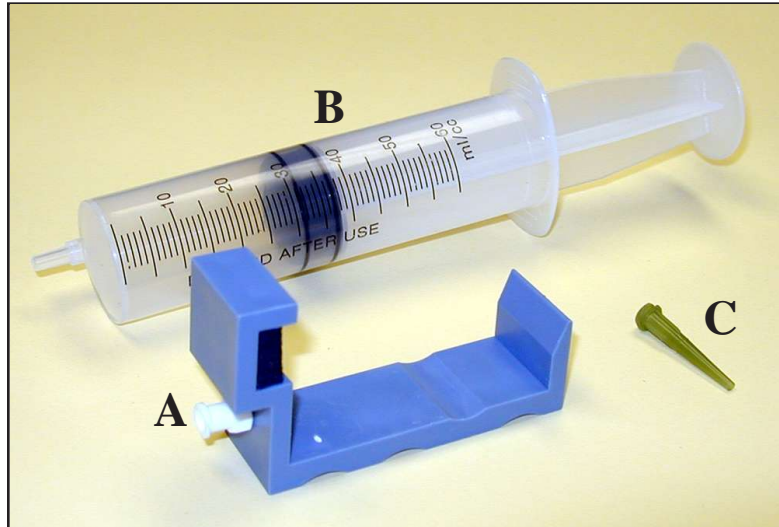

A. **Fill N Print™ 26/29A** with syringe fitting.

B. 60cc syringe

C. **Ink Tip** for drawing ink into syringe.

A.

1. Place your 26/29A cartridge in the **Fill N Print™**.
2. Attach the **Fill N Print™ 26/29A** fitting (A) firmly to the syringe (B).
3. Pull back on the syringe slowly. This will remove air and ink from the cartridge.
4. Place a piece of scotch tape over the air vent at the cartridge top.
5. Disconnect syringe from **Fill N Print™**.
6. Remove ink/air from syringe by pushing in on the syringe plunger.

B.

1. Attach the **Ink Tip** (C) to the syringe end (B).
2. Insert the tip into your ink container drawing out 42cc of ink.
3. Remove the **Ink Tip** from the syringe.
4. Attach the **Fill N Print™ 26/29A** fitting (A) to the syringe (B) again.
5. Firmly press the plunger on the syringe to begin filling the cartridge.
6. After all ink is dispensed into cartridge, remove the cartridge from the **Fill N Print™**.
7. Remove the tape from the air vent.
8. Wipe visible ink from cartridge printhead with a lint free cloth.
9. Store cartridge in plastic clip.
10. **NOTE:** If cartridge is full but it will not print you have a clogged printhead.
Clean the printhead by soaking in heated de-ionized water or INKOUT SOLUTION for 10-15 minutes then try again.